


## Lemur-FSP Specifications

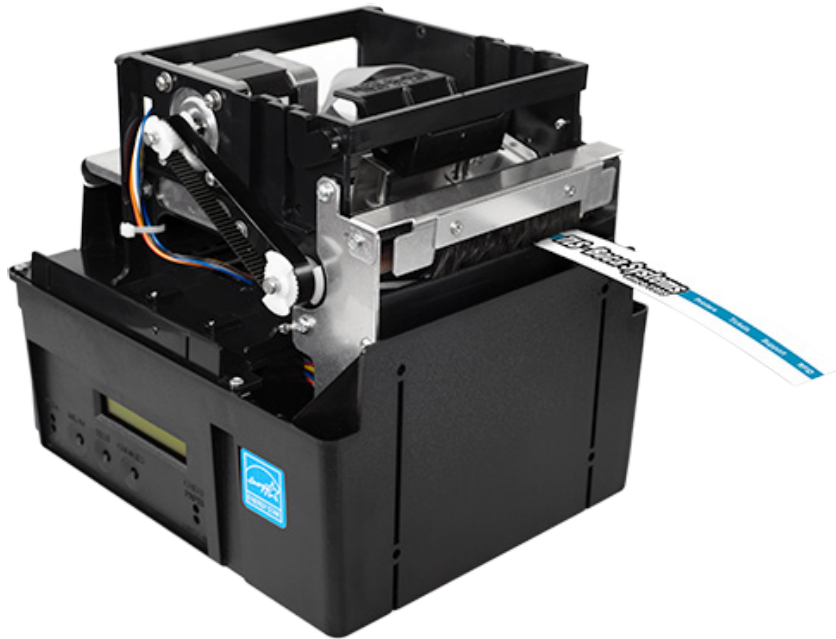

### General

**Print Method:** Direct Thermal  
**Print Speed:** up to 10" per second maximum.

**Resolution:** 203 (8 dots/mm), 300 dpi (12 dots/mm) or 600 dpi (optional).

**Size:** 19,6H x 15,8W x 21,6L cm (7.7H x 7.3W x 8.5L inches)

**Weight:** 4,3 kg (9.5 lbs.)

### Media Transport

**Media Type:** fanfolded tickets

**Ticket Thickness:** .004" to .011"

**Ticket Width:** 1" to 2"

**Positioning:** optical detector senses black mark

**Ticket Separation:** Intergrated cutter with hopper

### Interfaces

**Standard:** Serial, Parallel and USB

**Optional:** Ethernet, Bluetooth & Wi-Fi

### Protocols

**Standard:** FGL

**Drivers:** Windows, Mac and Linux

### Approvals

Designed to meet: UL / FCC / CE / CCC / ENERGY STAR / RoHS

### Power Requirements

100-240 VAC, 50/60 Hz, 80W max  
24 VDC, 100W max

### Power Consumption

Standby: 5W  
Normal printing: 34W

### Environmental

**Operating Temperature:** -20° to 60°C\*

**Relative Humidity:** 10% to 90%

**Storage Temperature:** -40 to 70°C above specs without condensation

### Bar Codes

Most 1D and 2D codes including PDF417, DataMatrix, QR, Aztec

Full speed printing of picket fence and ladder bar codes

### Fonts

**Resident fonts:** 16 bitmapped fonts (including Cyrillic and German characters) and Asian character sets (optional)

**Downloadable fonts:** HP Soft fonts / TrueType fonts

**Downloadable RAM:** up to 27MB

**Downloadable Flash:** up to 28MB (optional)

### Graphics

FGL format, PCX format (1bit b/w), BMP format (1bit b/w)

### Web Interface

Ethernet only  
Real-time status monitor  
Email notification

### Projected Life

**Cutter:** 1 million cuts

**Print Head:** 60 km of paper or 100 million dot activations

### Warranty

**Printer:** 1 year, parts and labor

**Print head:** 90 days

**Life time print head warranty when using exclusively our tickets**

### Patents

BOCA has a patented head protection system that prevents premature head failure

\* Print speed may be affected at extreme temperatures

