


Lemur-K Specifications

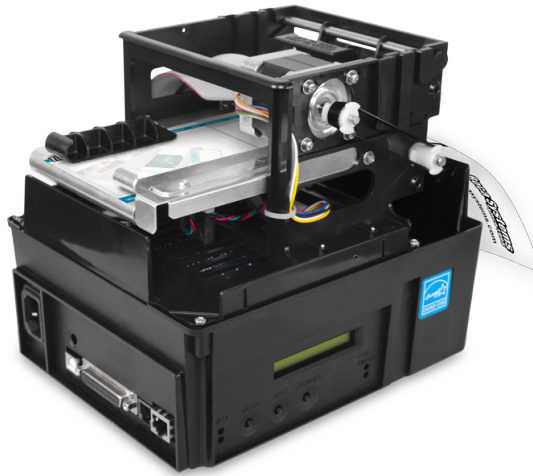

General

Print Method: Direct Thermal **Print Speed:** up to 10" per second maximum

Resolution: 203 (8 dots/mm), 300 dpi (12 dots/mm) or 600 dpi (optional)

Size: 19,6H x 15,8W x 21,6L cm (7.7H x 7.3W x 8.5L inches)

Weight: 2,7 kg (6 lbs.)

Media Transport

Media Type: Custom printed or blank fanfolded stock

Ticket Thickness: .004" to .011"

Ticket Width: 2.0" to 3.25"

Premium options: 1.0" to 2.0" or 2.0" to 4.0"

Positioning: Optical detector senses black mark

Ticket Separation: Manual tear-off or optional cutter with hopper

Interfaces

Standard: Serial, Parallel and USB

Optional: Ethernet, Bluetooth & Wi-Fi

Protocols

Standard: FGL

Printer Drivers: Windows, Mac and Linux

Approvals

Designed to meet: UL / FCC / CE / CCC / ENERGY STAR / RoHS

RFID (optional)

ISO14443, ISO15693, UHF EPC Gen2
Others available upon request

Power Requirements

100-240 VAC, 50/60 Hz., 80W Max
24 VDC, 100W max

Power Consumption

Standby: 5W

Normal printing: 34W

Environmental

Operating Temperature: -20° to 60°C*

Relative Humidity: 10% to 90%

Storage Temperature: -40 to 70°C
above specs without condensation

Bar Codes

Most 1D and 2D codes including
PDF417, Datamatrix, QR, Aztec

Full speed printing of picket fence
and ladder bar codes

Fonts

Resident fonts: 16 bitmapped fonts
(including Cyrillic and German characters)
and Oriental character sets (optional)

Downloadable fonts: HP Soft fonts
/ TrueType fonts

Downloadable RAM: up to 27MB

Downloadable Flash: up to 28MB
(optional)

Graphics

FGL format, PCX format (1bit b/w), BMP
format (1bit b/w). All graphics may be
printed live or stored for future use

Web Interface - Ethernet only

Real-time status monitor
(E-mail notifications)

Life Time:

Print Head Life Time: a minimum of
100 million activations per dot or 150
km of paper

Warranty

All units -1 year, parts and labour.
Print head - 90 days

**Life time print head warranty when
using exclusively our tickets**

Patents

BOCA has a patented head protection
system that prevents premature
head failure

* Print speed may be affected
at extreme temperatures